


- 3 Tonne lifting capacity
- Surface mounting
- 4-cylinder structure, 110mm minimum height
- Aluminium motor prevents overheating
- 24V safety control system
- 24V height limit switch
- Platforms extension for lifting long vehicles
- Pneumatic control locking device
- 115% dynamic and 150% static loading test passed
- CE approved.





Support Slope

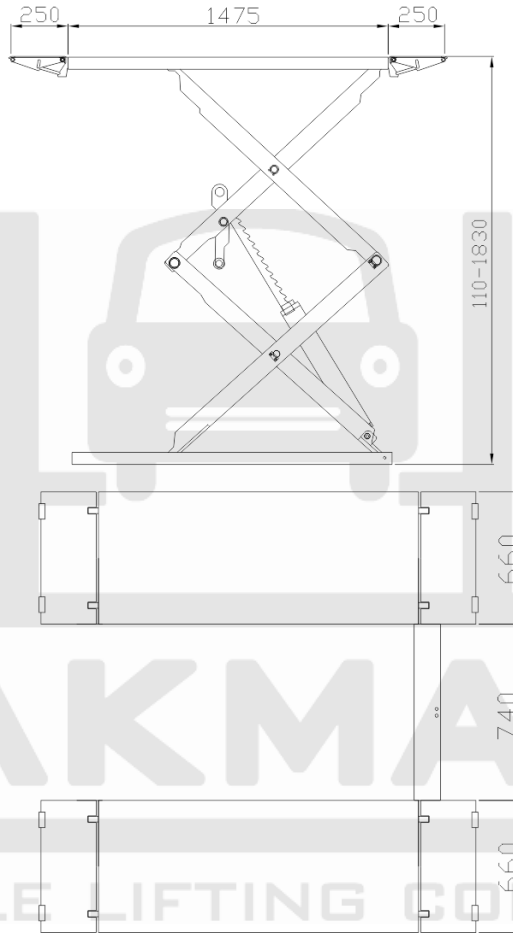

Strengthened Support Arm



Telescopic platform



Safety Locking Device